



LEVEL MEASURING WITH MAGNETIC GAUGE






Introductions

The ARAMAK magnetic liquid level gauge used to determine the volume of liquid contained within a tank. Because the magnetic level high pressure applications and hazardous locations are protected from the danger of a chemical spill due to glass failure.

The magnetic level gauge made in 2 Type :

- 1- Economical
- 2- Heavy duty

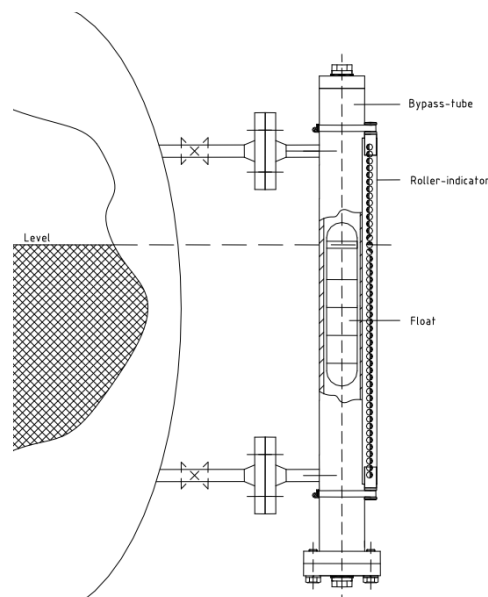

Applications

Typical industries:

- Oil and gas production
- Petrochemical
- Chemical
- Power generation
- Water and wastewater treatment
- Food and beverage
- Pharmaceutical
- Pulp and paper
- Biotech
- Semiconductor

Typical applications:

- Oil
- Water
- High and low pressure separators
- Oil and water interface
- Acids - hydrofluoric, hydrochloric, nitric, sulfuric, etc.
- Refined petrochemical - gasoline, propane, butane, ethylene, etc.
- Solvents - acetone, toluene, xy-

- lene, naphtha
- Gas condensate
- Heat transfer fluids - diathermy, thermion and glycol
- Black, green and red liquor
- Refrigerants
- Alcohols
- Caustics
- Chlorine
- Steam condensate - boiler feedwater heater boiler drum level control
- Bitumen
- Vacuum tower bottoms
- Ammonia
- Liquid Sulphur
- Most liquid to liquid interfaces



Mounting Type

Side Mounted Magnetic Level Gauge

- Highly visible level indication with no process fluid in contact with the glass
- All construction in house by code certified welders
- Float designed and weighted for maximum accuracy
- Transmitter and switch options which can be installed, adjusted and maintained with no process interruption
- Safe for corrosive, flammable, toxic, high-temperature and high-pressure applications
- Rugged design- low or no maintenance

Corrosive/Lightweight Magnetic Level Gauge


- PVC, CPVC, Polypropylene or PVDF construction (for lightweight MLGs)
- Titanium, Monel and Hastelloy (for corrosive applications)

Heat Traced and High Temperature Insulation Magnetic Level Gauge


- Electrical or steam heat tracing
- Removable insulation

Top Mount Magnetic Level Gauge


- Magnets above float connected with rod
- Slug catcher level
- Optional stilling wells
- Total or interface level measurement
- Underground tanks and sumps
- Fluids with magnetic particles
- Can be used with transmitters and switches




Side-Side




Top-Bottom



Top-Side




Bottom-Side

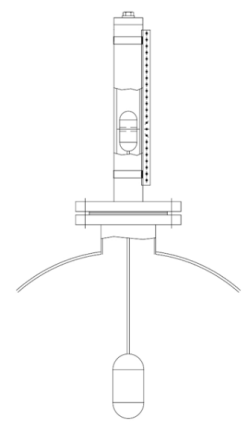


Top Mount



Typical Application

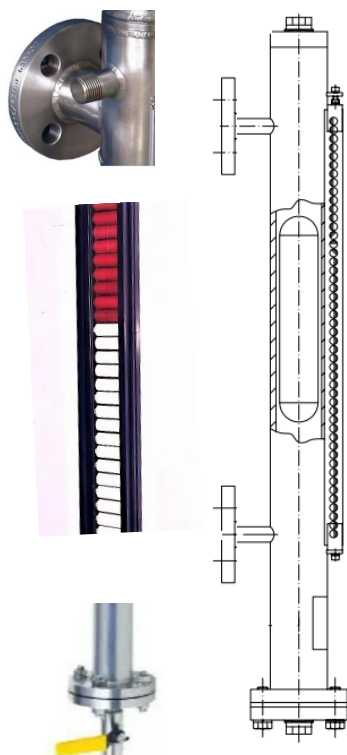

Economic

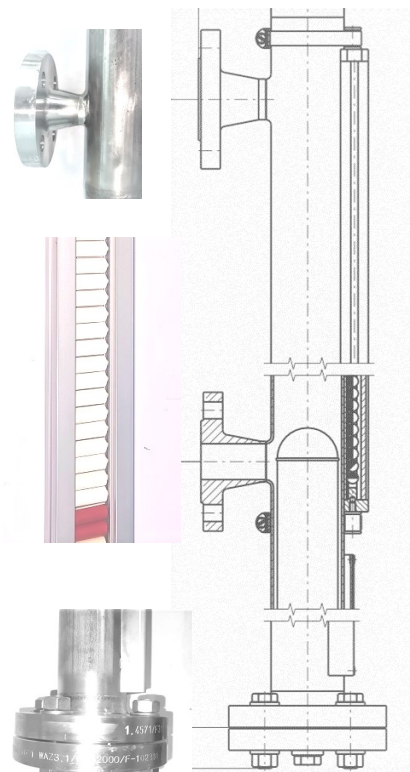

Standards

The magnetic level gauge made in 2 main type :

- 1- Economical
- 2- Heavy duty

Standards

- Measuring length: max. 6 m
- Operating temperature: $T = -196 \dots +450 \text{ }^\circ\text{C}$ -
- Operating pressure: $P = \text{vacuum to } 200 \text{ bar}$
- Limit density: $\rho \geq 340 \text{ kg/m}^3$
- Material: stainless steel 304, 316, Inconel
- Wide variety of different process connections and materials
- Explosion-protected versions
- Accuracy transducer: $\pm 1 \text{ mm}$
- Option: transmitter 4 - 20 mA, contacts

Economic

- Measuring length: max. 6 m
- Operating temperature: $T = -10 \dots +180 \text{ }^\circ\text{C}$ -
- Operating pressure: $P = \text{vacuum to } 30 \text{ bar(a)}$
- Material: stainless steel 304 or 316
- Limit density: $\rho \geq 340 \text{ kg/m}^3$
- Accuracy transducer: $\pm 1 \text{ mm}$
- Option: transmitter 4 - 20 mA, contacts



Accessories

Steam or electrical heat trace

Used to uniformly heat or cool process fluid

Magnetic traps

Fits in line with process connection
Also available in integral configuration
Air purge for roller

Vibration Isolator Connections

Absorbs large amounts of vibration
Eliminates signal distortion
Recommended for use on compressor and pump skids


Oversized chambers

Used to uniformly heat or cool process fluid allows vapors to pass floats when a fluid is close to vapor pressure and can be used in fluids with small suspended particles. Also used in conjunction with Teflon S coating for non-stick.

High temperature insulation


For extreme temperature environments, the ARAMAK magnetic level gauge is factory furnished/fabricated to offer high temperature insulation.

Bypass Chamber end Top

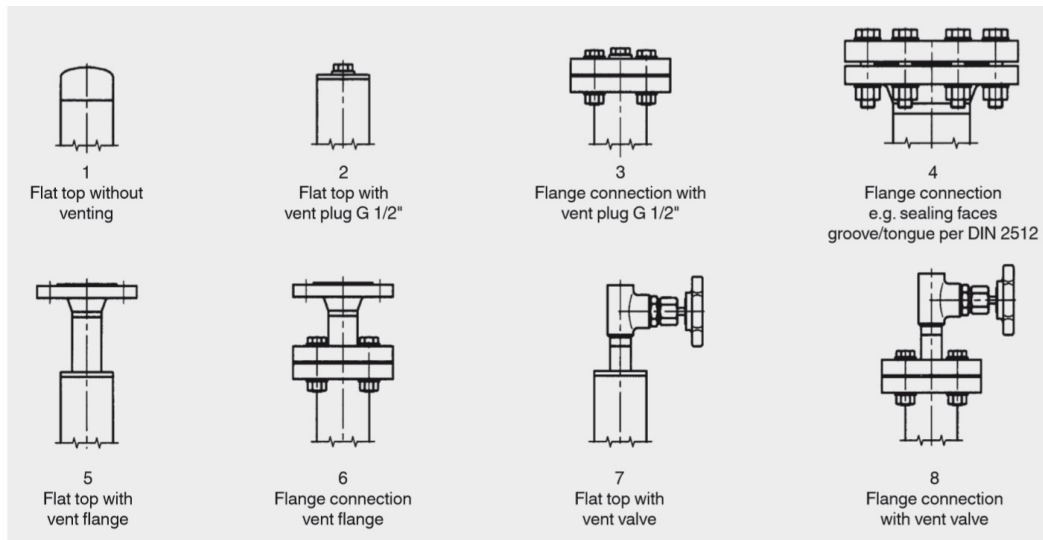

Other ends on request

Bypass Chamber end Bottom

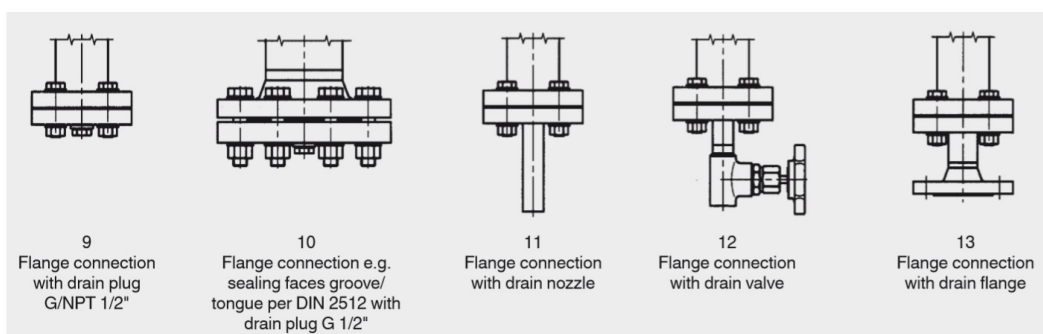

Other ends on request



Ordering Information

| MLG | XX | XX | XXXX | XX | XXX | XX | XX | XXX | XXX | XX | XX | XX | XXX | XXX | XXX |
|---|----|------|------|-----|-----|----|----|-----|-----|----|----|----|-----|-----|-----|
| Design | | | | | | | | | | | | | | | |
| Economic Type | ET | | | | | | | | | | | | | | |
| Standrars Type | ST | | | | | | | | | | | | | | |
| Mounting | | | | | | | | | | | | | | | |
| Side-Side | SS | | | | | | | | | | | | | | |
| Side-Bottom | SB | | | | | | | | | | | | | | |
| Top-Bottom | TB | | | | | | | | | | | | | | |
| Top Mount | TM | | | | | | | | | | | | | | |
| Special | ST | | | | | | | | | | | | | | |
| Center to Center Distance (mm) | | | | | | | | | | | | | | | |
| (mm, inside Diameter) | | XXXX | | | | | | | | | | | | | |
| Process Connection: | | | | | | | | | | | | | | | |
| ½" | | | I1 | | | | | | | | | | | | |
| ¾" | | | I2 | | | | | | | | | | | | |
| 1" | | | I3 | | | | | | | | | | | | |
| 1 ½" | | | I4 | | | | | | | | | | | | |
| 2" | | | I5 | | | | | | | | | | | | |
| Option | | | I6 | | | | | | | | | | | | |
| Operating Fluid Density (kg/m3) | | | | | | | | | | | | | | | |
| (Kg/m3) | | | | XXX | | | | | | | | | | | |
| Connection Rating | | | | | | | | | | | | | | | |
| ANSI Class 150 | | | | | | | A1 | | | | | | | | |
| ANSI Class 300 | | | | | | | A2 | | | | | | | | |
| ANSI Class 600 | | | | | | | A3 | | | | | | | | |
| ANSI Class 900 | | | | | | | A4 | | | | | | | | |
| ANSI Class 1500 | | | | | | | A5 | | | | | | | | |
| ANSI Class 2500 | | | | | | | A6 | | | | | | | | |
| PN 10 | | | | | | | P1 | | | | | | | | |
| PN 16 | | | | | | | P2 | | | | | | | | |
| PN 25 | | | | | | | P3 | | | | | | | | |
| PN 40 | | | | | | | P4 | | | | | | | | |
| PN 63 | | | | | | | P5 | | | | | | | | |
| PN 100 | | | | | | | P6 | | | | | | | | |
| PN 160 | | | | | | | P7 | | | | | | | | |
| NPT-Female | | | | | | | T1 | | | | | | | | |
| NPT-Male | | | | | | | T2 | | | | | | | | |
| G-Male | | | | | | | T3 | | | | | | | | |
| G-Female | | | | | | | T4 | | | | | | | | |
| Option | | | | | | | T5 | | | | | | | | |
| Chamber and Wetted Part Material | | | | | | | | | | | | | | | |
| Not Applicable | | | | | | | | 10 | | | | | | | |
| 316 / 316L stainless | | | | | | | | 11 | | | | | | | |
| 310 stainless steel | | | | | | | | 12 | | | | | | | |
| 321 stainless steel | | | | | | | | 13 | | | | | | | |



Ordering Information

| | | | | | | | | |
|----------------------------------|-----|--|--|--|--|--|--|--|
| 22 % Cr duplex | I4 | | | | | | | |
| Alloy 400 | I5 | | | | | | | |
| Alloy 625 | I6 | | | | | | | |
| Alloy 800 | I7 | | | | | | | |
| Alloy C276 | I8 | | | | | | | |
| PTFE | P1 | | | | | | | |
| PVC | P2 | | | | | | | |
| PTFE | P3 | | | | | | | |
| Polyethylene | P4 | | | | | | | |
| Polypropylene | P5 | | | | | | | |
| Other | P6 | | | | | | | |
| Float Material | | | | | | | | |
| Titanium | I0 | | | | | | | |
| 316 / 316L stainless | I1 | | | | | | | |
| 304 / 304 L stainless | I2 | | | | | | | |
| PTFE | P1 | | | | | | | |
| PVC | P2 | | | | | | | |
| PTFE | P3 | | | | | | | |
| Polyethylene | P4 | | | | | | | |
| Polypropylene | P5 | | | | | | | |
| Other | P6 | | | | | | | |
| Chamber End Top (Fig.) | | | | | | | | |
| Flat Without End | FV0 | | | | | | | |
| Flat with 1/2" vent Plug | FP1 | | | | | | | |
| Flat with 3/4" vent Plug | FP2 | | | | | | | |
| Flat with 1" vent Plug | FP3 | | | | | | | |
| Flanged with 1/2" vent Plug | FV1 | | | | | | | |
| Flanged with 3/4" vent Plug | FV2 | | | | | | | |
| Flanged with 1" vent Plug | FV3 | | | | | | | |
| High pressure Flanged | HV1 | | | | | | | |
| Flat top with vent Flanged | FF1 | | | | | | | |
| Flanged top with vent Flanged | FF1 | | | | | | | |
| Flat Top with 1/2" vent valve | PP1 | | | | | | | |
| Flat Top with 3/4" vent valve | PP2 | | | | | | | |
| Flat Top with 1" vent valve | PP3 | | | | | | | |
| FlangeTop with 1/2" vent valve | PF1 | | | | | | | |
| Flange Top with 3/4" vent valve | PF2 | | | | | | | |
| Flange Top with 1" vent valve | PF3 | | | | | | | |
| Other | PP0 | | | | | | | |
| Chamber End Bottom (Fig.) | | | | | | | | |
| Flanged with 1/2" vent Plug | FV0 | | | | | | | |
| Flanged with 3/4" vent Plug | FP1 | | | | | | | |
| Flanged with 1" vent Plug | FP2 | | | | | | | |
| High pressure Flanged | FP3 | | | | | | | |
| Flanged Bottom with vent Flanged | FV1 | | | | | | | |



Ordering Information

| | | | | | | | | |
|----------------------------------|-----|--|--|--|--|--|--|--|
| 22 % Cr duplex | I4 | | | | | | | |
| Alloy 400 | I5 | | | | | | | |
| Alloy 625 | I6 | | | | | | | |
| Alloy 800 | I7 | | | | | | | |
| Alloy C276 | I8 | | | | | | | |
| PTFE | P1 | | | | | | | |
| PVC | P2 | | | | | | | |
| PTFE | P3 | | | | | | | |
| Polyethylene | P4 | | | | | | | |
| Polypropylene | P5 | | | | | | | |
| Other | P6 | | | | | | | |
| Float Material | | | | | | | | |
| Titanium | I0 | | | | | | | |
| 316 / 316L stainless | I1 | | | | | | | |
| 304 / 304 L stainless | I2 | | | | | | | |
| PTFE | P1 | | | | | | | |
| PVC | P2 | | | | | | | |
| PTFE | P3 | | | | | | | |
| Polyethylene | P4 | | | | | | | |
| Polypropylene | P5 | | | | | | | |
| Other | P6 | | | | | | | |
| Chamber End Top (Fig.) | | | | | | | | |
| Flat Without End | FV0 | | | | | | | |
| Flat with 1/2" vent Plug | FP1 | | | | | | | |
| Flat with 3/4" vent Plug | FP2 | | | | | | | |
| Flat with 1" vent Plug | FP3 | | | | | | | |
| Flanged with 1/2" vent Plug | FV1 | | | | | | | |
| Flanged with 3/4" vent Plug | FV2 | | | | | | | |
| Flanged with 1" vent Plug | FV3 | | | | | | | |
| High pressure Flanged | HV1 | | | | | | | |
| Flat top with vent Flanged | FF1 | | | | | | | |
| Flanged top with vent Flanged | FF1 | | | | | | | |
| Flat Top with 1/2" vent valve | PP1 | | | | | | | |
| Flat Top with 3/4" vent valve | PP2 | | | | | | | |
| Flat Top with 1" vent valve | PP3 | | | | | | | |
| FlangeTop with 1/2" vent valve | PF1 | | | | | | | |
| Flange Top with 3/4" vent valve | PF2 | | | | | | | |
| Flange Top with 1" vent valve | PF3 | | | | | | | |
| Other | PP0 | | | | | | | |
| Chamber End Bottom (Fig.) | | | | | | | | |
| Flanged with 1/2" vent Plug | FV0 | | | | | | | |
| Flanged with 3/4" vent Plug | FP1 | | | | | | | |
| High pressure Flanged | FP3 | | | | | | | |
| Flanged Bottom with vent Flanged | FV1 | | | | | | | |
| Flange Bottom with 1/2" vent | FV2 | | | | | | | |



Ordering Information

| | | | | | |
|--|-----|----|----|--|----|
| Flange Bottom with 3/4" vent valve | FV3 | | | | |
| Other | PP0 | | | | |
| Transmitter | | | | | |
| Not Applicable | I0 | | | | |
| 4-20 mA , 24 VDC, Loop powered | I1 | | | | |
| 4-20 mA HART , 24 VDC, Loop powered | I2 | | | | |
| 4-20 mA HART, Exia, 24 VDC, Loop powered | I3 | | | | |
| 4-20 mA Exd , 24 VDC, Loop powered | I4 | | | | |
| 4-20 mA HART, Exd , 24 VDC, Loop powered | I5 | | | | |
| Other | I6 | | | | |
| Switch | | | | | |
| Not Applicable | S1 | | | | |
| 1 SPST, Reed switch, 1A @ 24VDC | S2 | | | | |
| 1 SPDT, Reed switch, 1A @ 24VDC | S3 | | | | |
| 2 SPST, Reed switch, 1A @ 24VDC | S4 | | | | |
| 2 SPDT, Reed switch, 1A @ 24VDC | S5 | | | | |
| 1 SPDT, SNAP Action, 4A @ 24VDC | S6 | | | | |
| 2 SPDT, SNAP Action, 4A @ 24VDC | S7 | | | | |
| 1 SPST, Reed switch, 1A @ 24VDC, Ex | E1 | | | | |
| 1 SPDT, Reed switch, 1A @ 24VDC, Ex | E2 | | | | |
| 2 SPST, Reed switch, 1A @ 24VDC, Ex | E3 | | | | |
| 2 SPDT, Reed switch, 1A @ 24VDC, Ex | E4 | | | | |
| Other | O1 | | | | |
| Isolating Vavle | | | | | |
| Not Applicable | | 0 | | | |
| Gate Valve Stainless Steel | | BC | | | |
| Ball Valve Stainless Steel | | BS | | | |
| Other | | O1 | | | |
| Certification | | | | | |
| Material certificates | | | C0 | | |
| Material NACE MR0175 | | | C1 | | |
| Material NACE MR0103 | | | C2 | | |
| Internal Pressure Test | | | C3 | | |
| 100% dimensional check | | | C4 | | |
| Hardness survey | | | C5 | | |
| Impact testing @ -196 °C (-320.8 °F) | | | C6 | | |
| Others | | | C7 | | |
| Added requirements | | | | | |
| Manufactured to customer drawing | | | | | DW |
| Heated or Coling Jacket | | | | | HJ |
| Electrical Heat Trace | | | | | ET |
| External Chamber | | | | | EC |
| Vibration Isolator | | | | | VI |
| Others | | | | | OT |



Contact us

**Instrumentation
manufacturer
& designer**

Tel : 021-46069694

Aramakco.com

Info@aramakco.com

Sales@aramakco.com